Installation instructions:

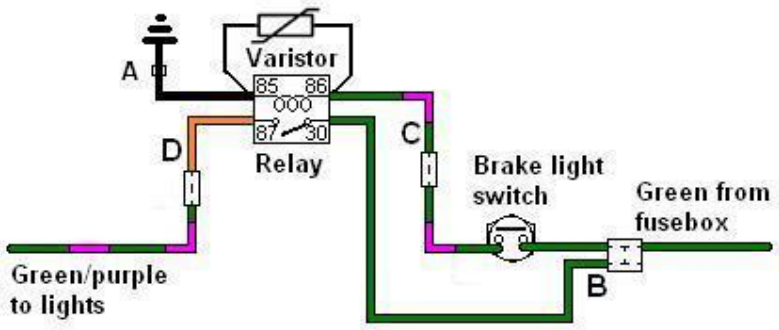

This relay is suitable for both positive and negative earth as it uses a varistor to protect the brake light switch contacts, but still uses a black wire for the earth connection.

1. Mount the relay with the black wire (A) to make a good connection to earth.
2. Disconnect the 2-way bullet connectors from the switch wires and the harness wires.
3. Fit the green wires from the harness and the switch into the 4-way bullet connector that is on the green wire from the relay (B).
4. Connect the green/purple relay wire (C) to the green/purple switch wire using a 2-way bullet connector.
5. Connect the orange relay wire (D) to the green/purple harness wire using another 2-way bullet connector.

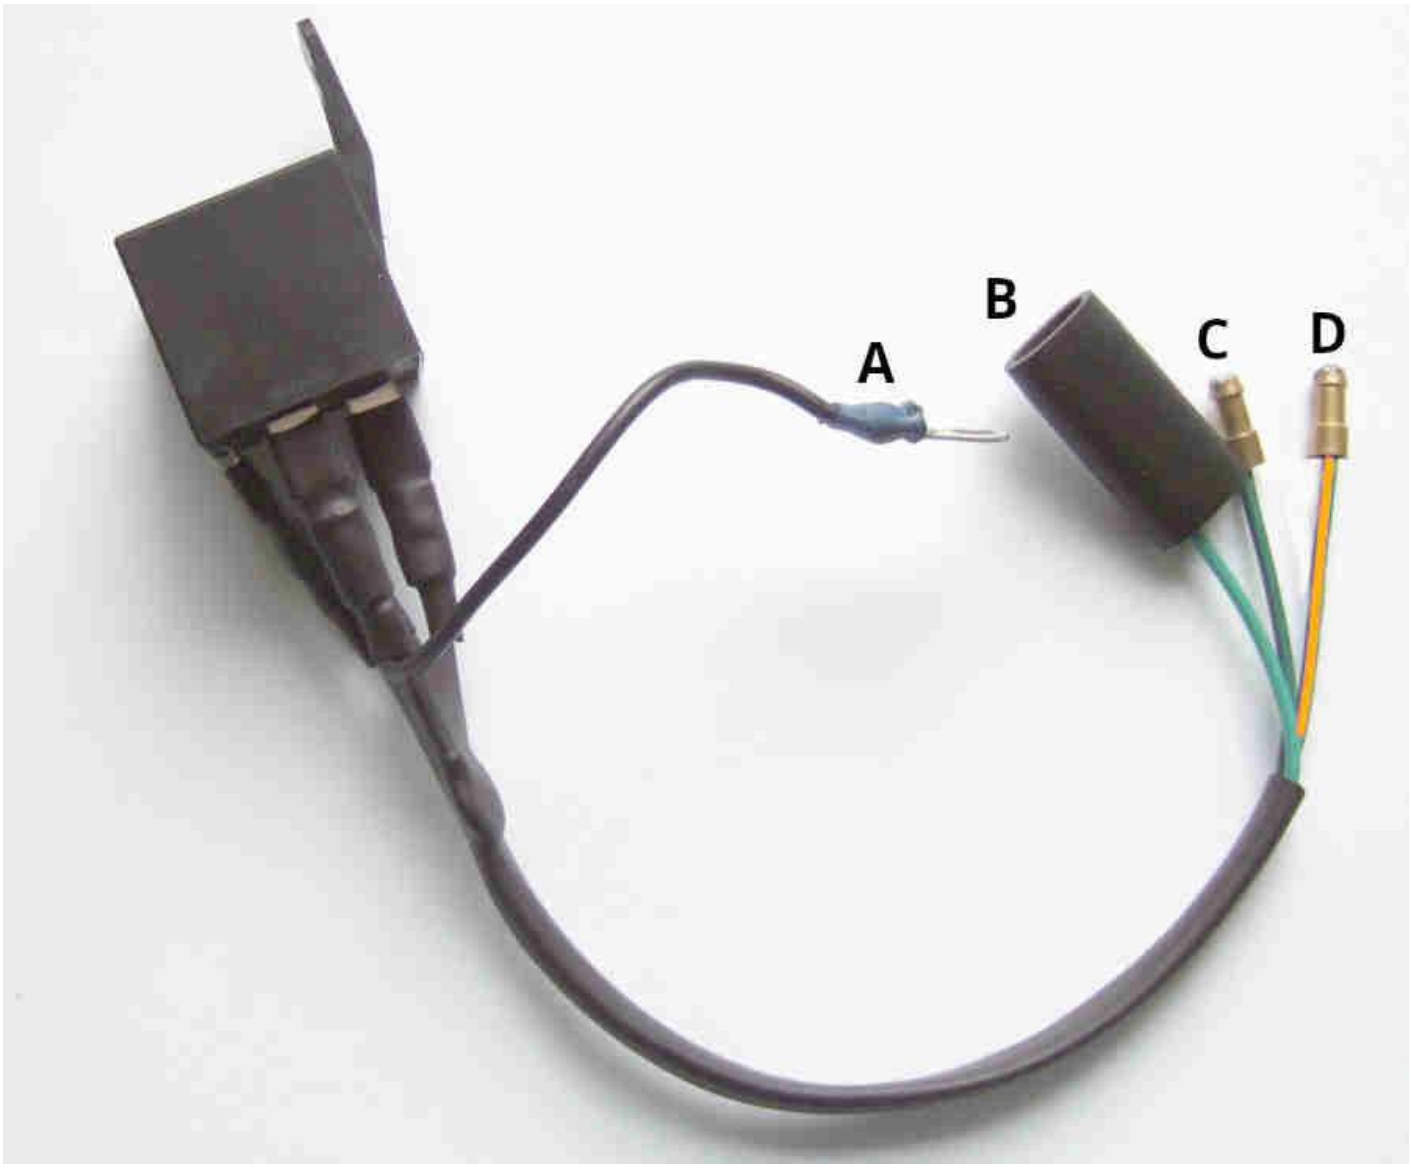

As a test and to double-check the connections before you operate the brake pedal, with the ignition on bridge the brake light switch terminals. Check that the relay operates (clicks) and the brake lights come on.

If nothing happens check the connections again, particularly the earth.

paulbhunt73@gmail.com